

## Lily



### Features

- Ultra modern, stylish and Innovative design
- Excellent light distribution, a blend of space + accent lighting. Innovative hybrid of edge lit and back lit lighting technology
- Color variable, different color for spatial and accent lighting
- Energy efficient, >100lm/W
- Anti-Glare UGR19
- No UV or IR emissions
- Durable with life span over 35,000 hours
- Environmentally friendly – fully recyclable, no mercury or other hazardous materials
- Simple and convenient installation

### Applications

A perfect luminaire for open space area in various applications such as:

- Restaurants
- Offices
- Residentials
- Theatres
- Shopping malls



## Sheenly LED Space Lighting



Sheenly's new designed LED Light Lily is a revolutionary product, which developed for space lighting + Accent Lighting, A fixture combines space and accent lighting. This product has a built-in driver, and stylish appearance with innovative design.

A hybrid of edge lit and backlit technology gives an excellent blend of space and accent lighting, making it the first of its kind in the lighting industry. Lily is a perfect luminaire for open space area in various applications.

### Specifications

<b>Dimension</b>	D380*90 mm
<b>Power &amp; Lumen Output</b>	
26W	2400 lm @ 4000K
36W	3250 lm @ 4000K
<b>Color Temperature</b>	
Warm White	3000K-3300K
Natural White	4000K-4300K
Pure White	5700K-6000K
<b>Color Rendering Index</b>	>80
<b>Rated Life (L70)</b>	50,000 Hours
<b>Housing</b>	Aluminum
<b>Optics</b>	Opal/Micro Prismatic
<b>Beam Spread</b>	Up/Down
<b>Operating Temperature</b>	-20°C to +60°C (Amb.)
<b>Input Voltage</b>	200-240V/AC
<b>Power Factor</b>	>0.95
<b>Working Voltage</b>	
26W	24 V/DC
36W	27 V/DC
<b>Working Current</b>	1400 mA
<b>Net Weight</b>	2.5 Kg
<b>Glow Wire</b>	650 °C (850°C Optional)
<b>IP</b>	IP20
<b>IK</b>	IK05
<b>Installation</b>	Suspension

## Dimension and Illumination Diagram

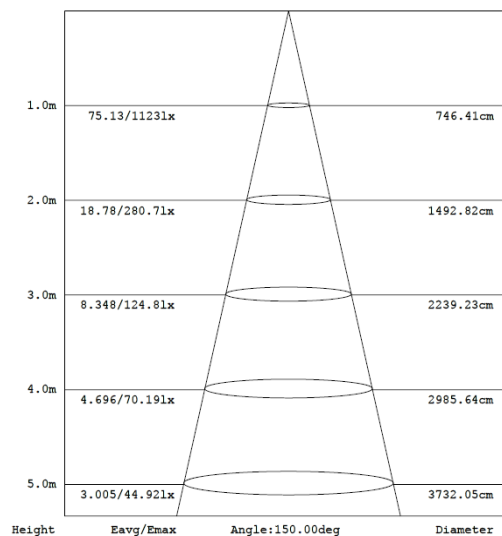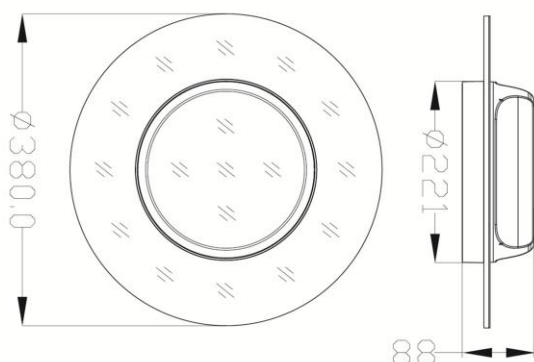

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	26W 36W	WW=3000K NW=4000K PW=6000K	LY	BK=Black SI=Silver	

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-PAN-26W-WW-LY	26W	3000K	2200	Up/Down	D380*90 mm
SL-PAN-26W-NW-LY	26W	4000K	2400	Up/Down	D380*90 mm
SL-PAN-26W-PW-LY	26W	6000K	2600	Up/Down	D380*90 mm
SL-PAN-36W-WW-LY	36W	3000K	3050	Up/Down	D380*90 mm
SL-PAN-36W-NW-LY	36W	4000K	3250	Up/Down	D380*90 mm
SL-PAN-36W-PW-LY	36W	6000K	3450	Up/Down	D380*90 mm

## Accessory



Suspension Kit:  
Steel Cables, Screws, etc.



**Shanghai Sheenly Lighting Co., Ltd.**






No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2014 Sheenly Lighting all rights reserved.

## Lily Space Lighting Installation Manual

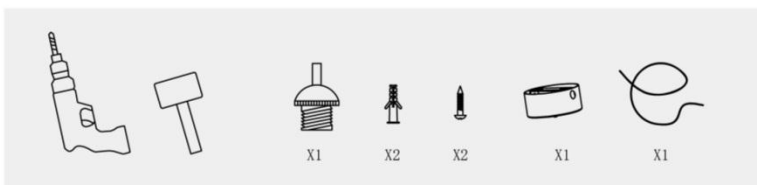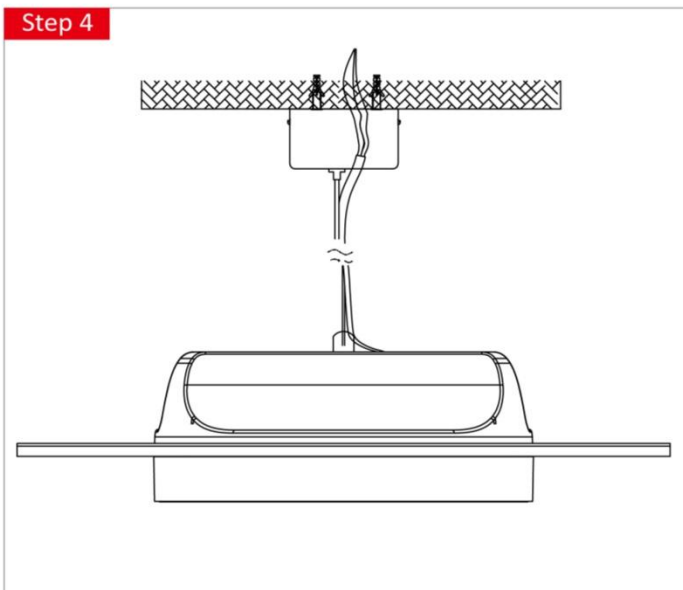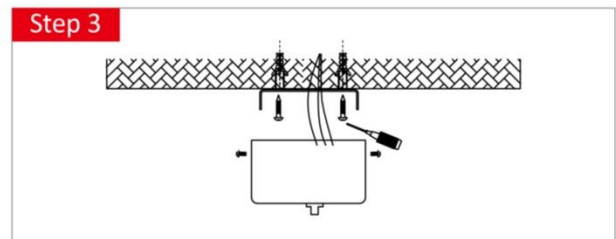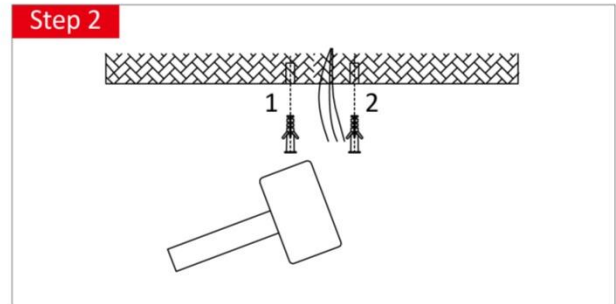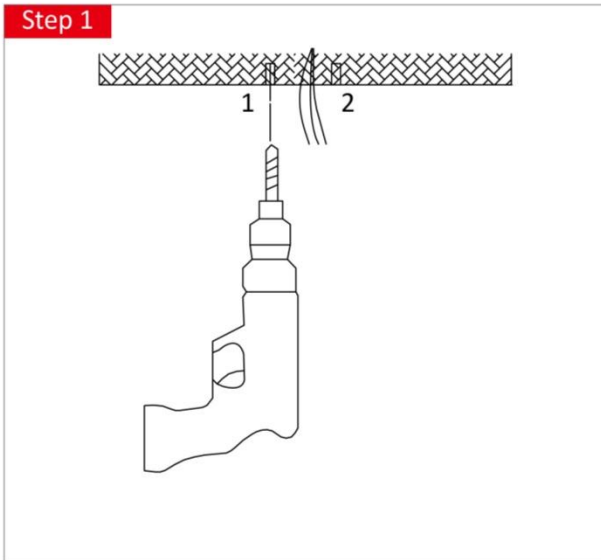

***Lighting Up a New World***